

Supermaxi 7-20 and 7-24

Range Ø 180-504 mm (7,08" – 19,84")
Optional 180-590 mm i/d





New generation machine equipped with an innovative 6 points of contact locking system able to grant stability and absence of vibrations during the operations.

The installation and centering are extremely easy, precise and functional.



The unit is equipped with easily interchangeable tools for any angle of bevel which come in various hardness scales in relation to the material typology:

- 8% cobalt
- titanium coated
- tip of hard metal

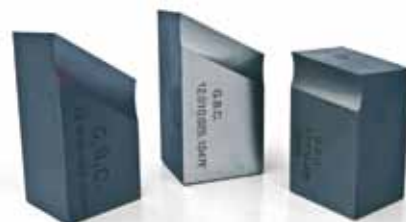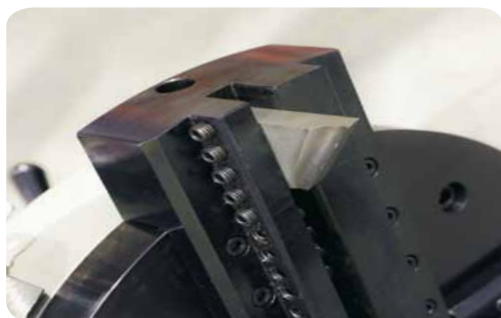

Supermaxi 7-20 and 7-24


PNEUMATIC

HYDRAULIC

ELECTRIC

| | | 180-504 7,08-19,84 | 180-504 7,08-19,84 | 180-504 7,08-19,84 |
|-----------------------|-------------------|----------------------------------|----------------------------------|----------------------------------|
| locking Range | mm inches | | | |
| idle speed | rpm | 11 | 15 | 18 |
| axial stroke | mm inches | 50 1,96 | 50 1,96 | 50 1,96 |
| pneumatic motor power | hp w | 4 2940 | - | - |
| air consumption | l/min cfm | 2690 95 | - | - |
| air pressure | bar psi | 6 90 | - | - |
| air hose connection | pollici inches | 3/4" | - | - |
| hydraulic motor power | hp w | - | 6,8 5000 | - |
| max oil pressure | bar psi | - | 100 1450 | - |
| oil flow rate | l/min gpm | - | 30 7,8 | - |
| electric motor power | hp w | - | - | 3,2 2400 |
| tension | volt | - | - | 110 / 220 |
| frequency | hz | - | - | 50 / 60 |
| max acoustic emission | db | 75 | 75 | 75 |
| machine weight | kgs | 245 | 245 | 245 |
| machine "A" ø | mm inches | 550 (630opt) 21,65 (24,80opt) | 550 (630opt) 21,65 (24,80opt) | 550 (630opt) 21,65 (24,80opt) |
| machine "B" Length | mm inches | 880 34,64 | 830 32,68 | 800 31,5 |

We guarantee we have successfully passed the electric and immunity safety test, internal tests, and to be compliant with to the European Norms in force.

