

Mini Auto Compact

Portable pipe bevelling machine Completely hand operated No foot pedal or control box

 Range: 20 - 42 mm i/d (optional from 12,5 mm i/d).

• Functions: bevelling, facing, counterboring.

• Materials: any kind of steel.

Power: pneumatic.


 Note: a unique machine specifically designed for the facing back of tubes and seal weld removal in heat exchangers, condenser, etc. Ideal for high volume repetitive work. This model has an automatic feed and stop.




AUTOMATIC FEEDING STOP SENSOR




The sensor will automatically stop the cut each time at the desired distance with a tolerance +/- 0.1mm and return the cutter head to the original start position.



EXAMPLES OF CUTTER BITS

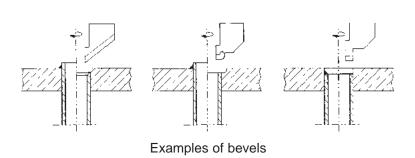






Mini Auto Compact

TECHNICAL FEATURES

| * | Locking tube range | mm(i/d.) | 20-42 |
|-----|-----------------------------------|----------|-------------|
| * | Recommended working range | " (o/d.) | 3/4"-1 1/2" |
| *** | Idle speed | rpm | 210 |
| ** | Torque | kgm | 2,3 |
| * | Length of axial feed | mm | 40,0 |
| *** | Max operating temperature | C° | 55 |
| *** | Max noise level | dB | 75 |
| ** | Pneumatic motor power | hp | 0,38 |
| ** | Air consumption | cfm | 15-18 |
| ** | Air working pressure | psi | 90 |
| * | Air hose connection | inches | 1/2" |
| * | Unit weight | kg | 4,0 |
| * | Packing dimensions | mm | 600x600x200 |
| * | Packing weight * mechanical data | kg | 15 |
| | | | |



** mathematical data *** average data



 All units are supplied complete with all gripping segments to cover the full range of the machine. Service tools, filter lubricator, drawings, instruction manual and warranty certificate are also supplied as standard.