

SB500

Floor mounte pipe bevelling machine Range 100 - 508 mm (4" – 20")



*Detail of the chips
collecting tray*



*Detail of the mobile
head feeding motor*



*Detail of the locking
vice*

Semi-automatic unit structurally strong and at the same time user friendly. The locking vice design enables the automatic centring and positioning without causing deformation to the pipe.


The on board control panel enables to adjust the chuck speed and feeding as well as the feeding of the mobile head and the activation of the refrigerating liquid pump.

The SB500 can be equipped with easily interchangeable tools, both HSS type and insert type.

- Vice designed for automatic centring without deformation;
- On board control panel;
- Chuck feeding adjustment;
- Mobile head feeding adjustment;
- Chuck speed adjustment;
- Cooling liquid recycling pump;
- Interchangeable tooling with Supermaxi 7_24 and Hypermaxi 20_36.

SB500

- DIMENSIONS

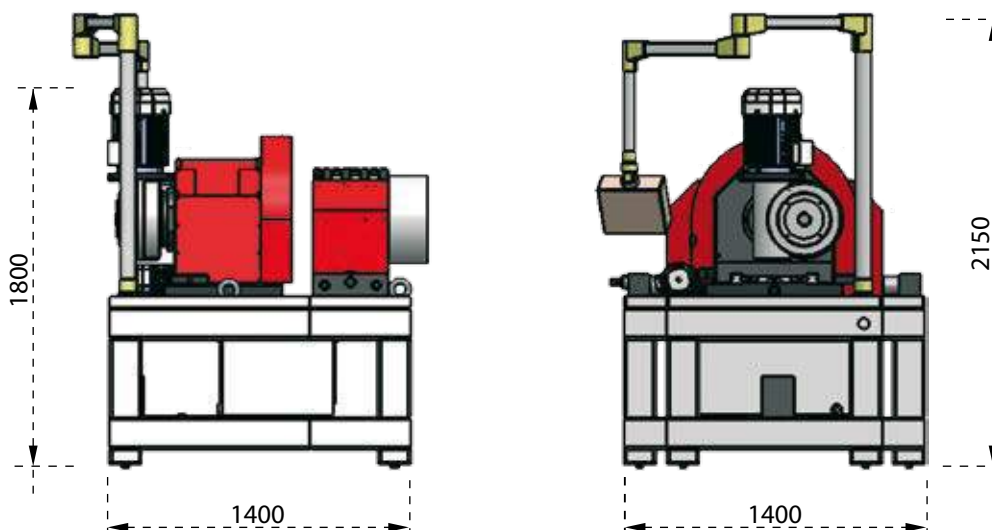

- TECHNICAL FEATURES

Locking range	mm in	100 -508 4" - 20"
Pipe thickness	mm	25
Idle Speed	giri/min	0 ÷ 28
Electric motor power	Hp(W)	9500
Tension	V	400
Power	kW	10
Frequency	Hz	50/60
Max Acoustic Emissions	db	75
Weight	kg	2350

*Different voltage available on request